
TURNING LEAVES QUILT PROJECT

Beginner friendly!

Featuring ROSY DECO | Amy MacCready



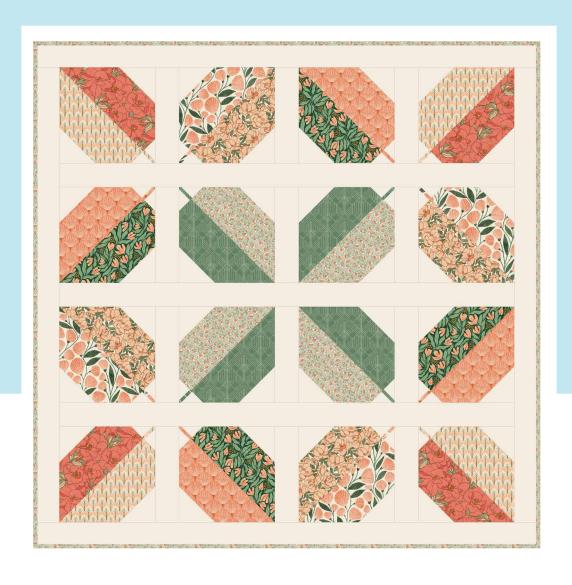

INFO & MATERIALS

TURNING LEAVES QUILT PROJECT

SIZE: 58 ½" x 58 ½"

DESIGNER: Michelle Engel

TECHNICAL EDITOR: Linda Spiridon

This project uses 8 different fabrics See chart below for fabric quantities 2 ¼ yd background fabric ½ yd binding 3 ¾ yards backing

32- 41/2" squares

16-4" squares

strips)

From background fabric cut:

12- 12½" x 2½" sashing strips

5-54" x $2\frac{1}{2}$ " (peiced from WOF

2- 60" x 2½" sashing strips (pieced from WOF strips)

Note: All possible care has been taken to assure the accuracy of this pattern. We are not responsible for printing errors or the manner in which individual work varies. Please read instructions carefully before starting the construction of this quilt. If desired, wash and iron your fabrics before starting to cut.

OULLT FACE MATERIALS

Cutting dimensions include 1/4" seam allowances.

½ yds each of 8 different printed fabrics (see chart below)

- 2-13" squares from each fabric
- 4-34" x 6" strips from FABRIC A, C, F, G (for stems)

227421	
227426	
FABRIC E	



227422

FABRIC F



227424

FABRIC G



FABRIC D 227425

FABRIC H

fabric that is the same color on both

Use a solid





FABRIC

sides and has no pattern

ASSEMBLY DIRECTIONS

- 1. Place two 13" printed fabric squares right sides together. Draw a diagonal line and sew ¼" along each side of the line. Cut along center line and press to make half square triangle blocks. Trim to 12½" square. [fig 1]
- 2. Cut the 16 4" squares from BACKGROUND FABRIC in half diagonally and insert FABRIC A, C,
- F, G 3/4" x 6" strips to make stem squares. Trim to 31/2" square. [fig 2]
- 3. Pin the background 4½" squares to the two corners of the print blocks that have no seams. Sew diagonally, trim corners, open, and press flat. [fig 3]
- 4. Pin the 3½" stem square to one corner with a seam. Sew diagonally, trim the corner and press flat. [fig 3]
- 5. Arrange blocks according to QUILT DIAGRAM. Insert BACKGROUND FABRIC 121/2" x 21/2" sashing strips to make rows. [fig 4]
- 6. Piece BACKGROUND FABRIC sashing strips 54" x 2½" and sew between rows as well as along top and bottom. [fig 4]
- 7. Piece BACKGROUND FABRIC sashing strips 60" x 2½" and sew to sides of quilt.
- 8. Layer the backing, batting and quilt top. Baste, quilt and bind.

